



Hulas Cladex



RECOMMENDED — USAGE —



False Ceiling



Wall Partition Interior & Exterior





Attractive Looks



Climate Resistant




Long Lasting







Hulas Cladex

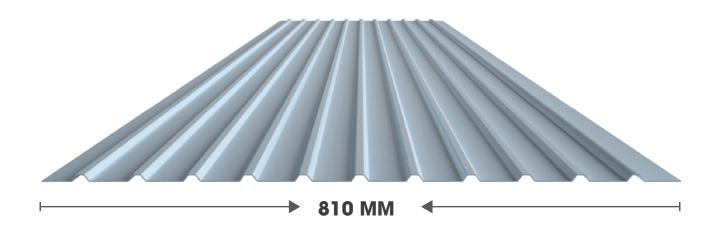

Profile

Hulas Cladex

Shapes & Dimension of Profile



Effective Width (mm)

780

Base Metal Thickness (mm)

0.24 to 0.35

Available in Length (ft)

6' to 18'

SPECIAL FEATURES

OF HULAS CORRUGATED **COLOR ROOFING SHEETS**



Made with International Cold Rolled Steel



Imprinted with Hulas 'Gurans' logo



Aluminium & Zinc Coating



(Prime Coat) Prevents Climate Effects



Colors that Prevent UV and other harmful Rays



Made with Japanese Standard



50+ Micron High Quality Coating



Affiliated with the World's Best Paint Technology by Beckers



Environment Friendly Technology



ECCA Compliant Coil Coating Standard





Hulas Steel Industries Limited

Corporate Office: Sundhara, Ganabahal, Kathmandu GPO: 4129

Toll free no.: 16600178888 / 16600179999 Email: info@hsi.com.np



Factory: Simara, Bara
Tel: +977 53 520075 / 76 / 77
Fax: +977 53 520160









